

THIS DRAWING IS NOT TO BE COPIED OR SCALED

PRAM CROSSING ADDED

CONSTRUCTION ISSUE

PRELIMINARY ISSUE

REMARKS

TELSTRA SERVICES & PITS

- EX TELSTRA SERVICES & PITS

— · · · — · · · — TOP OF BATTER

_____ - _ _ TOE OF BATTER

PLAN REVISED


LEVELS REVISED

LEGEND

TREES TO BE RETAINED

TREES TO BE REMOVED





FILL IN EXCESS OF 200mm CUT IN EXCESS OF 200mm

THIS PLAN SHOWS APPROXIMATE EXTENTS OF CUT AND FILL TO BE UNDERTAKEN DURING CONSTRUCTION OF THE WORKS BASED ON THE EXISTING SITE SURFACE LEVELS AND PROPOSED FINISHED DESIGN LEVELS SHOWN.

THE EXTENT OF FILL SHOWN IS BASED ON DESIGN AND MAY BE SUBJECT TO CHANGE DURING CONSTRUCTION.


THE DEPTH OF TOP DRESSING FILL MAY VARY BY UP TO 0.15m.

ALL VEHICLE CROSSINGS AND FOOTPATHS/SHARED PATHS ARE TO BE REINFORCED CONCRETE WITH SL72 REINFORCING MESH

TACTILE PAVERS MUST BE INSTALLED IN ACCORDANCE WITH THE AUSTRALIAN STANDARD DESIGN FOR ACCESS AND MOBILITY, PART 4.1 AND VICROADS ROAD DESIGN NOTE 06-06, GUIDELINES FOR THE PLACEMENT OF TACTILE GROUND SURFACE INDICATORS.

CROSSOVERS MUST BE PROVIDED IN ACCORDANCE WITH THE GAA EDCM FIGS 101 (SINGLE) AND 011 (DOUBLE). CONSTRUSTION MUST BE APPROVED BY WORKS CENTRE. CROSSOVERS MUST BE LOCATED A MINIMUM OF 1.0m FROM ANY SERVICE FACILITIES.

LINE MARKING, SIGNAGE AND RRPM'S MUST BE INSTALLED IN ACCORDANCE WITH AUSTRALIAN STANDARDS AND BE DDA COMPLIANT.

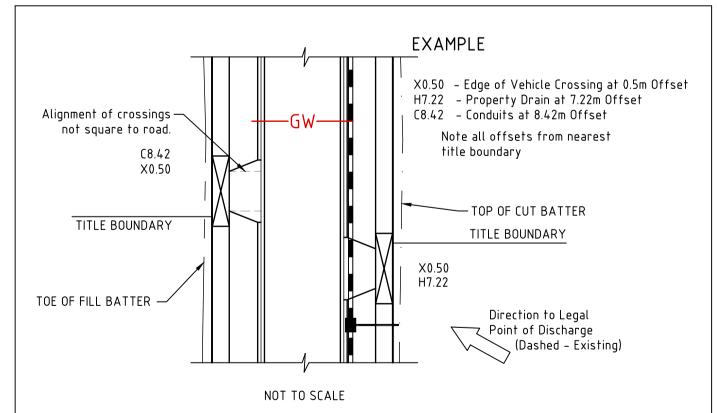

WARNING

BEWARE OF UNDERGROUND SERVICES THE LOCATIONS OF UNDERGROUND SERVICES ARE APPROXIMATE ONLY AND THEIR EXACT POSITION SHOULD BE PROVEN ON SITE. NO GUARANTEE IS

NOT APPROVED FOR CONSTRUCTION

CITY OF CASEY HONOUR VILLAGE ESTATE STAGE 6

LAYOUT PLAN

DRAWING No. VERSION REFERENCE 22344E/6

2 OF 11

www.reedsconsulting.com.au

UTHORISED

 AHD

DATUM

EX FENCE

EX WALL OR BUILDING

engineering@reedsconsulting.com.au p [03] 8660 3000

Lvl 6, 440 Elizabeth Street Melbourne Victoria 3000