
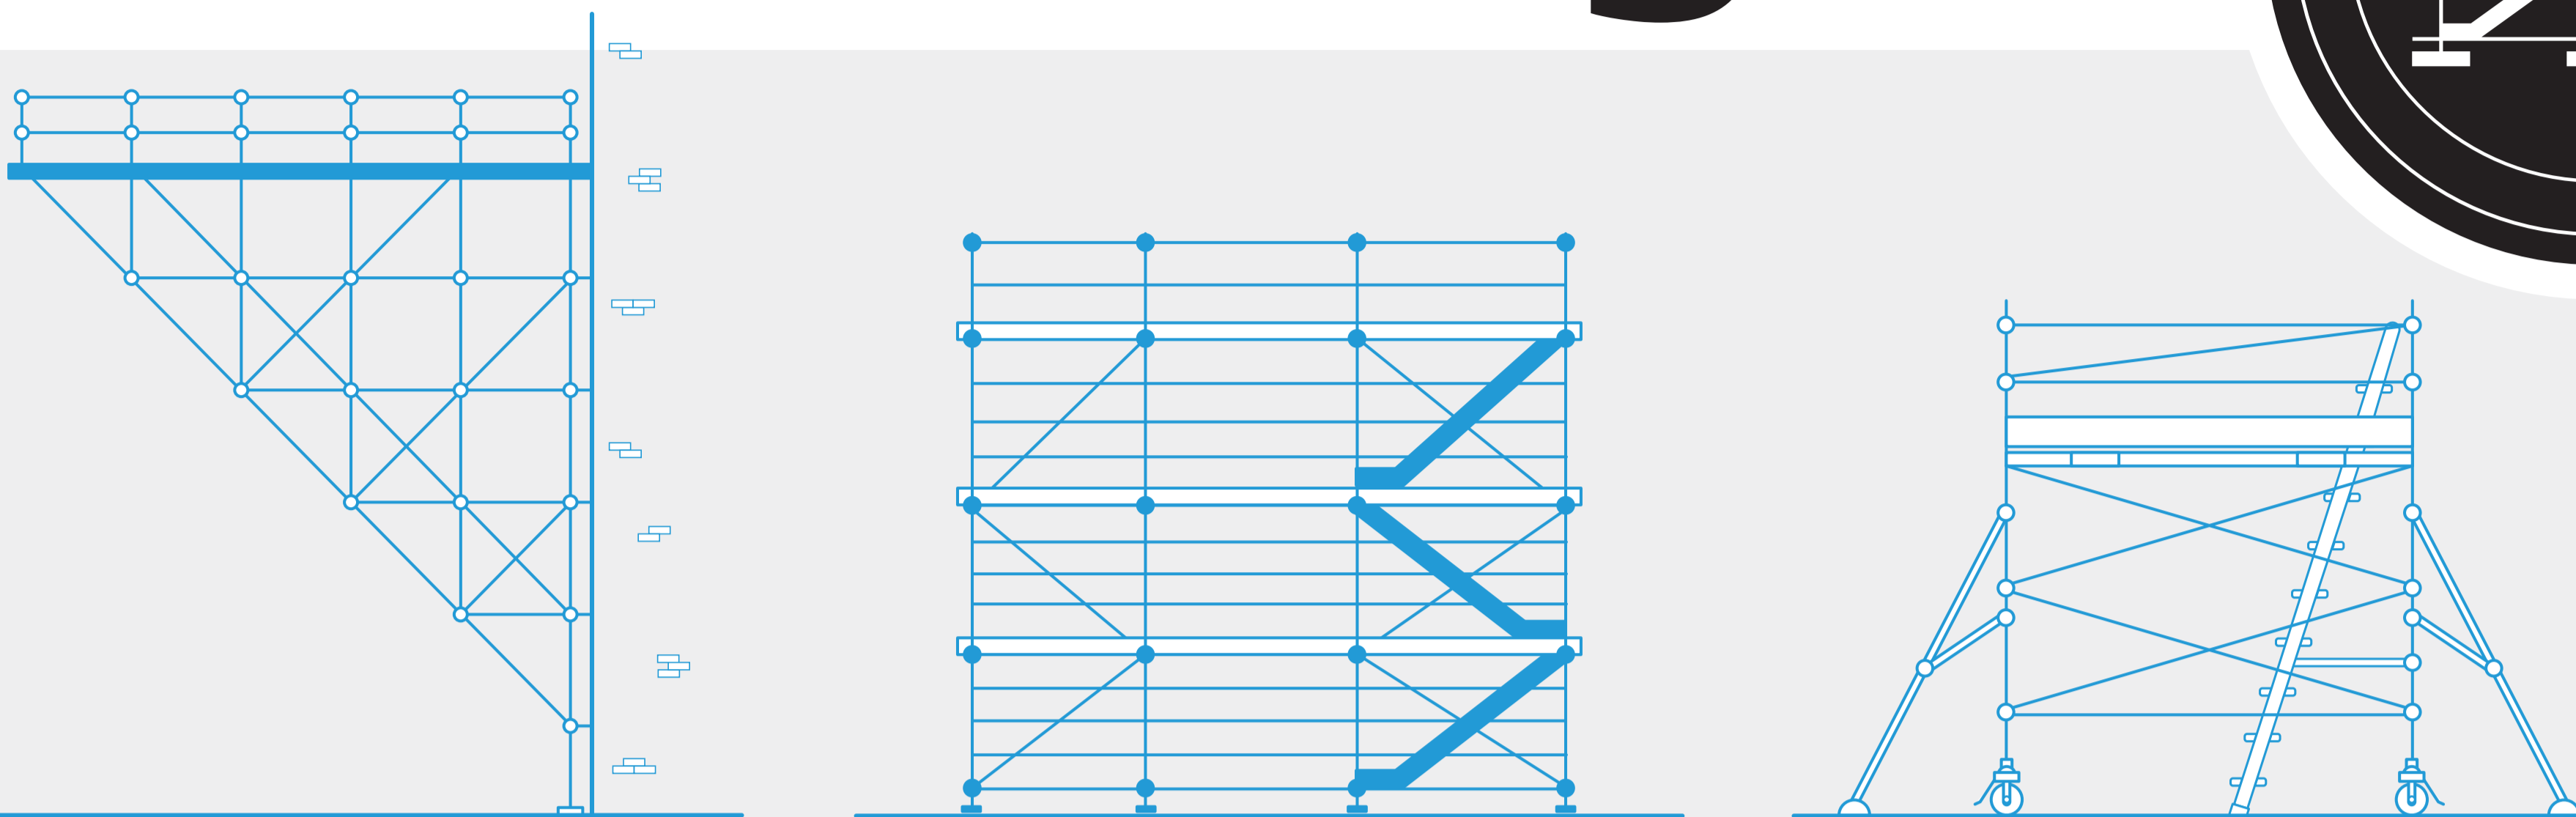


Scaffolding

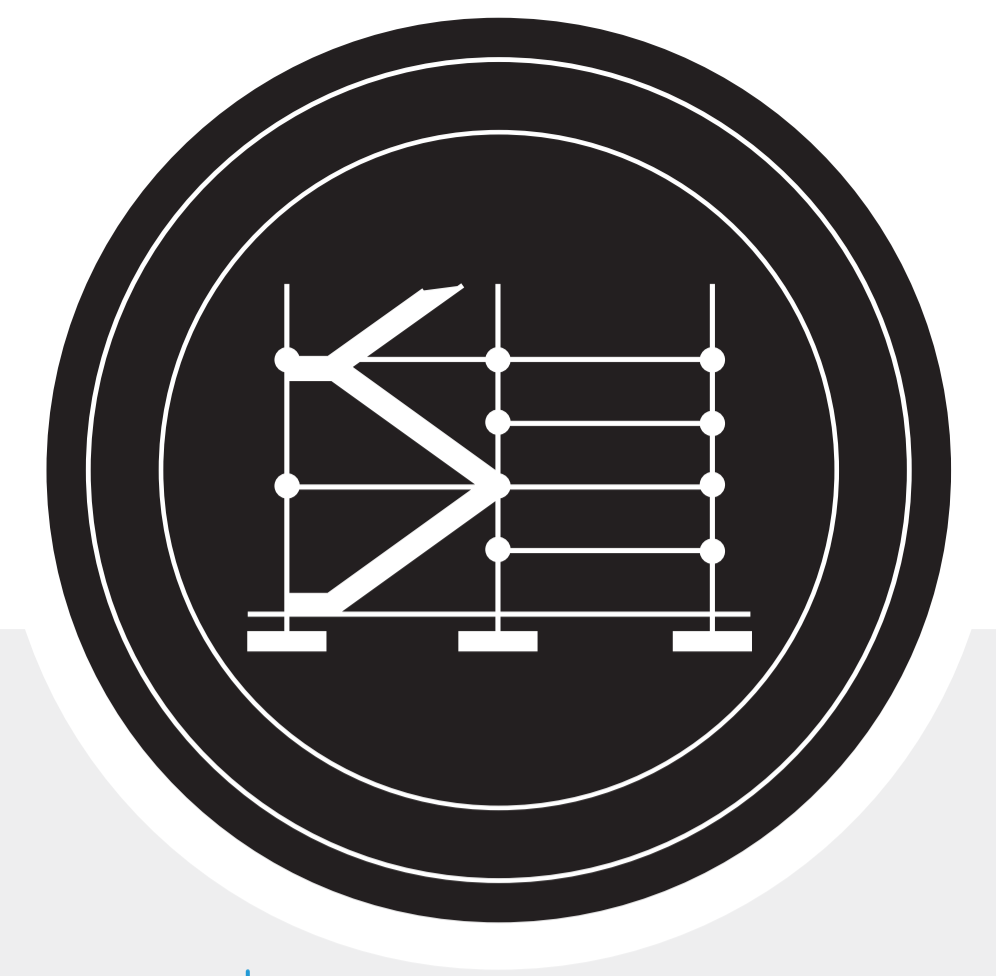

Risk - Scaffold collapse and fall from height

Eliminate

If possible complete work from ground level


Minimise

If not eliminated, I will apply the below controls as a minimum:


Scaffold collapse



Unauthorised alterations or modifications are prohibited

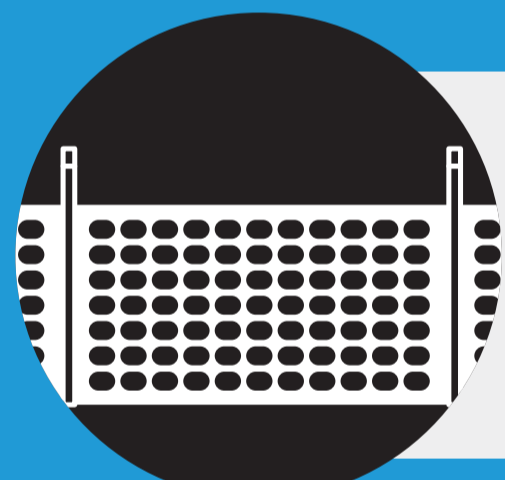

Physical exclusion zones are established during erection and dismantling

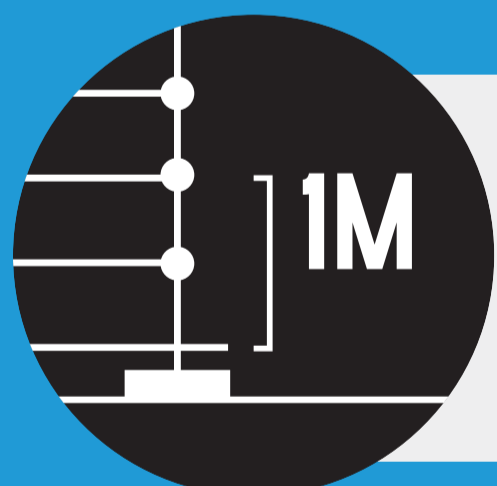


Scaffolds are erected and dismantled sequentially in 1-meter lifts



Access to incomplete scaffolds is restricted

Falls during erection, alteration, dismantle and use

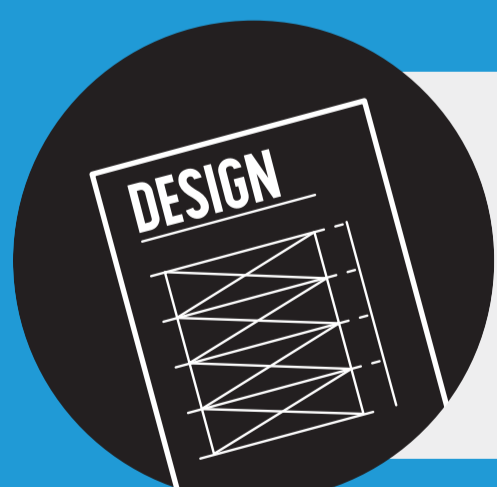


Scaffolding above 4 meters must be designed



Scaffolds must be erected, altered and dismantled by a competent person



Defined complex scaffolding must be engineered

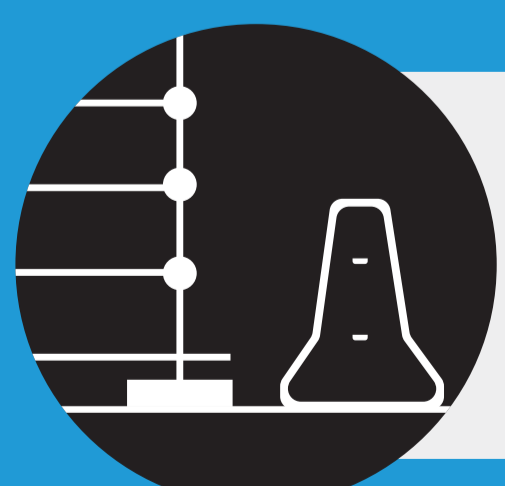

Scaffolds must be physically protected from impact



Scaffolding must be regularly inspected



Our **Risk Standards**

Any questions or feedback? Reach out to our team on site.